

Extraordinary Illumination & Durability

80"

NEW 80 INCH LED

"ANOTHER INDUSTRY FIRST"

Prices and specifications subject to change without notice

Exceptional Performance & Energy Efficiency

STYLELINE LED Plus provides both reflective and refractive optics for superior light uniformity, merchandise visibility and glare reduction allowing your reach-in doors product stand out!

- Meets or exceeds the "LM80" standards
- Fewer Components - Reduces the potential of failure and maintenance liability
- Delivers in store levels up to 1,200 lux at the center of the shelf
- Uses 5mm High-Output LED batch diode
- 5-year warranty on workmanship & materials



Extraordinary Illumination & Durability

Dimming Control

For use with SloanLED Cold Series refrigerated display units

Occupancy sensor based dimming to increase energy savings while maximizing visual appearance of merchandise.

- Extends LED life
- Selectable dimming power levels
- Available with standard or wide angle sensor
- Up to 50% increase in LED energy savings with dimming

Specifications

Electrical

Input range	8 - 28 VDC
Power	100 W Max
Current	4.1 A Max

Performance

Operating temperature -40 °C to 50 °C

Control

Dim mode brightness may be set to 50%, 25%, 12.5% or 0% of non-dim state brightness (25% is the default setting from factory)

Construction

Housing	Plastic overmold
Body color	White

Documentation

Warranty	5 year limited
Agency listings	UL, CE, RoHS
Files available	OEM data sheet (sensors)



Prices and specifications subject to change without notice.

Settings


Brightness

Selectable Duty Cycle output via SW1 and SW2 (Brightness Level when shoppers in area)

SW1	SW2	SW3	SW4	Brightness Level
OFF	OFF	X	X	N/A
ON	OFF	X	X	Energy Saver
OFF	ON	X	X	Standard (default)
ON	ON	X	X	MerchandiserMAX

Dimensions

RDL-Dimming Controller

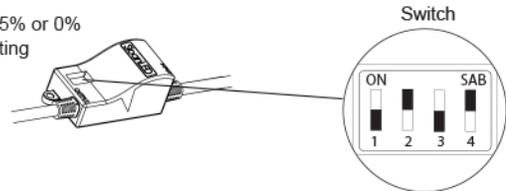


Dimming

Selectable Duty Cycle output via SW3 and SW4 (Brightness Level when area is not occupied)

SW1	SW2	SW3	SW4	Brightness
X	X	OFF	OFF	0%
X	X	ON	OFF	12.5%
X	X	OFF	ON	25% (default)
X	X	ON	ON	50%

Motion Sensors



1.12" x 1.38" x .5"

